



LIGHTING SPECIFICATION

PROJECT			
TYPE	LED LINE BAR (간접등 / 안정기 별도형)		
LOCATION			
QUANTITY		MODEL NO.	무도트 기본형

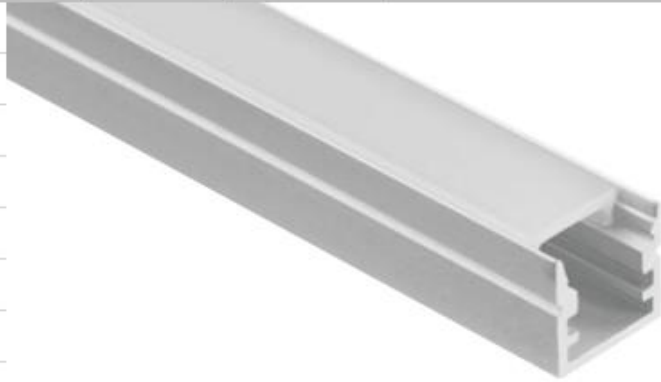


F I X	SIZE	W1000 x D10 x H10 (mm)	L A M P	LED Chip	DC 12V / SAMSUNG
	Body	Aluminum		Chip Size	3528
	Cover	PC(Milky)		WATT	14.4W / M
	Cutting unit	25MM , 20MM		COLOR TEMP.	3000K, 4000K, 5000K, 6500K

NOTE

LIGHTING SPECIFICATION

PROJECT			
TYPE	LED LINE BAR (간접등 / 안정기 별도형)		
LOCATION			
QUANTITY		MODEL NO.	무도트 슬림형






F I X	SIZE	W1000 x D8 x H9 (mm)	L A M P	LED Chip	DC 12V / SAMSUNG
	Body	Aluminum		Chip Size	3528
	Cover	PC(Milky)		WATT	14.4W / M
	Cutting unit	25MM , 20MM		COLOR TEMP.	3000K, 4000K, 5000K, 6500K

NOTE

LIGHTING SPECIFICATION

PROJECT			
TYPE	LED LINE BAR (간접등 / 안정기 별도형)		
LOCATION			
QUANTITY		MODEL NO.	무도트코너형 대/소

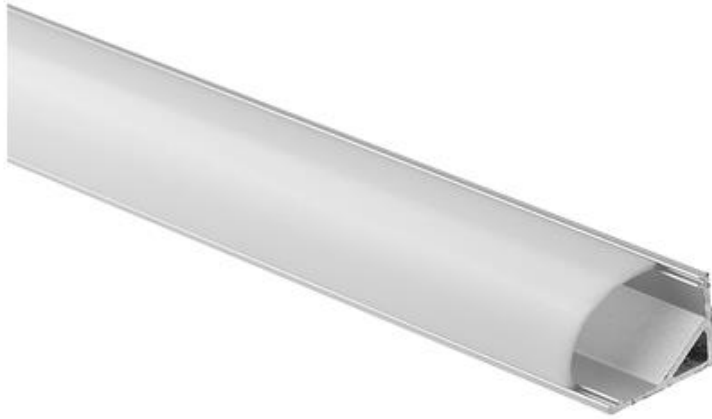


F I X	SIZE	대 : W1000 x D16 x H16 (mm) 소 : W1000 x D10 x H10 (mm)	L A M P	TYPE	LED DC 12V / SAMSUNG
	MATERIAL	ALUMINUM, PC 유백 COVER		WATT	14.4W / m
	BEAM SPREAD	-		BASE	-
	CUTTING UNIT	-25MM , 20MM		COLOR TEMP.	6500K , 5000K, 4000K, 3000K

NOTE

LIGHTING SPECIFICATION

PROJECT			
TYPE	LED LINE BAR (간접등 / 안정기 별도형)		
LOCATION			
QUANTITY	MODEL NO.	무도트 홀타입	



F I X	Size	W1000 x D9 x H10 (mm)	L A M P	LED Chip	DC 12V / SAMSUNG
	Body	Aluminum		Chip Size	3528
	Cover	PC(Milky)		Watt	14.4W / M
	Cutting unit	25MM , 20MM		Color Temp.	3000K, 4000K, 5000K, 6500K

NOTE