



Non-PF-Series

YD-60W

- ☐ Constant Voltage Power Supplies
- ☐ AC Input Voltage Range : 200-230VAC 60Hz
- ☐ IP65 For Outdoor Installations
- ☐ Protections(hiccup) : SCP, OCP
- ☐ Safety : K61347-1, K61347--2-13, K62384 compliant

KC No. : JH11522-20002



Input Specifications

parameter	Conditions/Description	Min	Nor	Max	Units
Input Voltage Range	220VAC Input	210	220	230	VAC
Input Frequency Range			60		Hz
Input Current	60W Input		0.5		A
Inrush Current	At 220VAC VAC input, 25°C Cold start			30	A


Output Specifications

parameter	Conditions/Description	12V	24V	Units
Output Current	Full load (@45°C)	4.5(3.6)	2.3(1.9)	Ampere
Voltage Accuracy	% of Vout	±8	±5	%
Line Regulation	220Vac Full load	±2	±2	%
Load Regulation	220Vac Full load	±5	±2	%
Ripple and Noise	20MHz Bandwidth	500	1000	mV
Turn-on Delay	Measured at 220VAC and full load	2	2	s
Short Circuit Protection	Output shut down with auto-recovery			

General Specifications

parameter	Conditions/Description	Min	Nor	Max	Units
Withstand Voltage	Input to Case(10mA, 1Minute)		2,000		VAC
Efficiency(Typical)	See individual models		90.0		%
Life time	Load 70% at 25°C		25,000		Hours
Weight			125		g
Operating Temperature		-20		+ 40	°C
Storage Temperature		-30		+ 70	°C
Relative Humidity	Non-condensing (operating)	10		90	%RH
Power Derating	At 220VAC, derates linearly from 100% at 25°C to 70% at 40°C				

DIMENSIONS

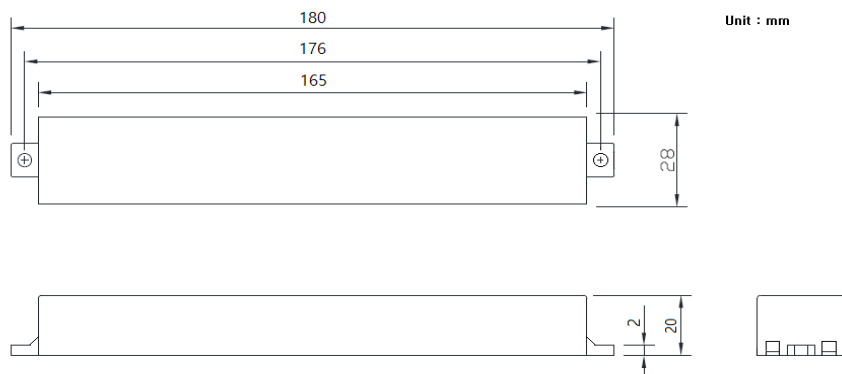

Unit : mm

INPUT / OUTPUT WIRING

INPUT CABLE : 0.5mm² *2/ Black(N) and White(L), 140±20mmOUTPUT CABLE : 0.5mm² *2 / Red(+V) and Black(-V) , 140±20mm